


NK WINDOWS uPVC Systems Outward Opening Window Head - Direct Fix w/ 105mm Sill

System:Aluplast Ideal 4000Cladding:XVersion:1.01, JAN19Scale:1:2

DISCLAIMER: All details are for indicative purposes only. Installation methods should comply with manufacturers recommendations and relevant NZ Building Code regulations & Standards. CONFIDENTIALITY: No part of this publication may be reproduced or transmitted other than the intended use by NK Window Solutions Ltd unless expressly agreed by the author.




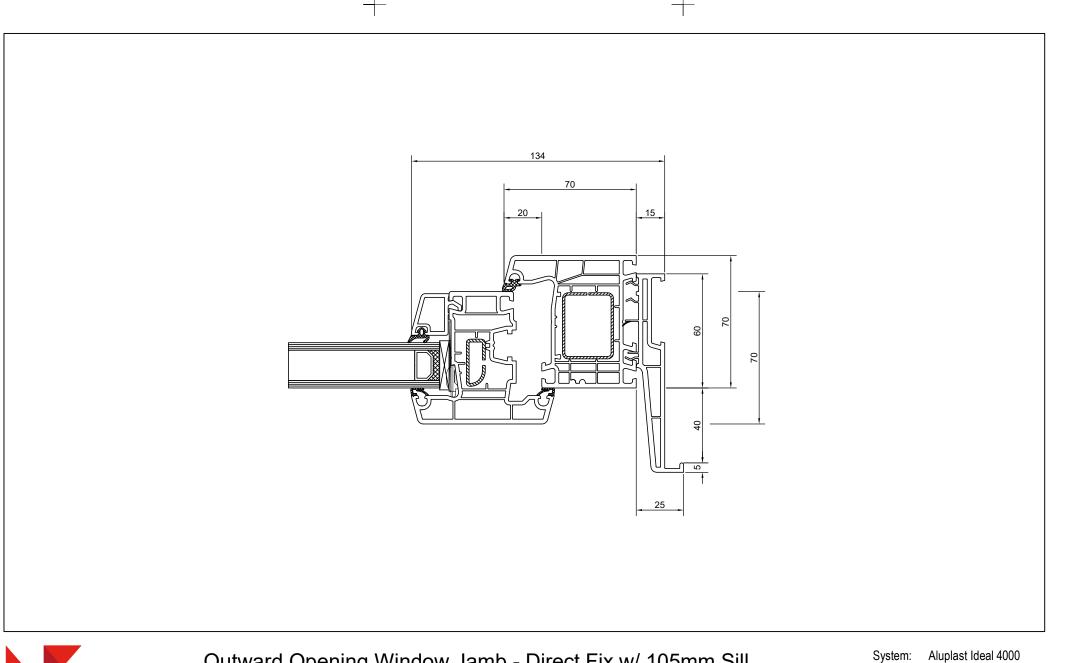

Outward Opening Window Jamb - Direct Fix w/ 105mm Sill

Cladding: X Version: 1.01, JAN19 Scale: 1:2

DISCLAIMER: All details are for indicative purposes only. Installation methods should comply with manufacturers recommendations and relevant NZ Building Code regulations & Standards. CONFIDENTIALITY: No part of this publication may be reproduced or transmitted other than the intended use by NK Window Solutions Ltd unless expressly agreed by the author.

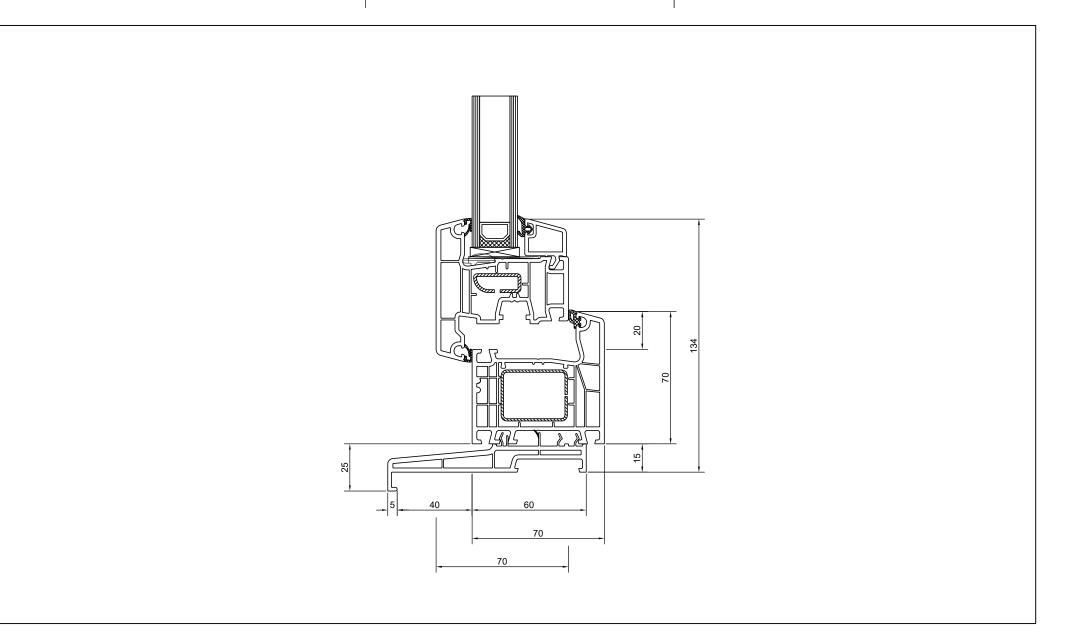



Outward Opening Window Sill - Direct Fix w/ 105mm Sill

System:Aluplast Ideal 4000Cladding:XVersion:1.01, JAN19Scale:1:2

DISCLAIMER: All details are for indicative purposes only. Installation methods should comply with manufacturers recommendations and relevant NZ Building Code regulations & Standards. CONFIDENTIALITY: No part of this publication may be reproduced or transmitted other than the intended use by NK Window Solutions Ltd unless expressly agreed by the author.